B.L.Shipway

ESTABLISHED 1953

VINTAGE 2019

Food & Beverage Product Range

• HOSE • FITTINGS • CLAMPS • ACCESSORIES

SOUTH AUSTRALIA VINTAGE 2019

E-mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

RICHMOND
217 Richmond Rd, Richmond SA 5033
PHONE: (08) 8352 1144
Fax: (08) 8443 6327

Certified System™
Quality
ISO 9001
SAI GLOBAL

B.L. Shipway
ESTABLISHED 1953
& CO. PTY. LTD.

South Australia's Fluid Power Specialists

Hydraulics, Pneumatics, Hose & Fittings

Hello and welcome to B.L. Shipway's 2019 Vintage Food & Beverage Product Catalogue.

As with previous years, we continue to bring you the most comprehensive range of wine hose and associated products available. We source our products from far and wide, with an emphasis on offering fit for purpose Australian made products wherever possible.

The addition of the world renowned Trelleborg premium quality rubber wine hose range to our portfolio has been well received by the industry. BL Shipway is the sole distributor of Trelleborg food-grade hose in SA.

We have also added a PVC heat-shrink product to our range (see page 21). In addition to adding a protective layer to strapped hose assemblies, it is available in a range of colours to allow for easier identification.

An increasing number of wineries have recognised the benefits of crimped fittings on their wine hoses. Our in-house workshop service is capable of crimping fittings onto hoses up to 6" I.D., in order to offer a more hygienic, secure and safe solution for your hose assemblies.

We continue to receive great feedback from our customers in relation to RYCO's Rubber Brewers Suction and Delivery Hoses (as shown on page 13), and Barfell's quality range of Australian made PVC wine and washdown hoses, including the Heavy Duty Claret Wine Hose and Wine Transfer Hose (see page 5).

Today's demanding business environment requires all of us to minimise downtime and consequently our offering for the Wine Industry only includes premium quality products at competitive prices. Where possible we prefer and recommend Australian made hoses.

Thank you for taking the time to browse our product range. Please contact our Wine Industry Specialist, David Ringwood, our Commercial Director, Todd Shipway, or any of our helpful internal sales staff for further assistance on the contact numbers below.

Best wishes for a productive and safe vintage, we look forward to hearing from you soon.

Yours faithfully

David Shipway AM
Managing Director

Contact Details

Customer Service	(08) 8352 1144 sales@blshipway.com.au
David Ringwood	0418 833 608 davidringwood@blshipway.com.au
Todd Shipway	0418 833 620 todds@blshipway.com.au
Fax	(08) 8443 6327

SOUTH AUSTRALIA

Business Address: 217 Richmond Road **RICHMOND** SA 5033
Postal Address: PO Box 330 Marleston SA 5033
Phone: (08) 8352 1144 Fax: (08) 8443 6327
ABN 35 653 208 644
E-mail: sales@blshipway.com.au Web site: www.blshipway.com.au

Certified System
Quality
ISO 9001
SAI GLOBAL

2019 VINTAGE

INDEX

ORDER/ENQUIRY FORM FOR EMAIL/FAX 3

HOSE

PVC SUCTION, DELIVERY AND WINE TRANSFER HOSES 5-8
PVC WASHDOWN & WATERING HOSES 9
PVC SPECIAL & MULTI-PURPOSE PRESSURE HOSES 10-11
ECONOMICAL PVC SUCTION HOSES 12
RUBBER WINE HOSES - RYCO 13
TRELLEBORG'S WORLD-RENOWNED RUBBER WINE HOSE 14-18
RUBBER WINE HOSE 19
RUBBER HOSES - BRINE & GENERAL PURPOSE 20
HOSE PROTECTION - HEAT SHRINK TUBING & SPIRAL GUARD 21
HOSE HANDLE 22

HOSE ASSEMBLIES & CONNECTORS

BL SHIPWAY CAN ASSEMBLE YOUR HOSES 23
CLAMPS Bandimex, Bolt Clamps & Worm Drive Clamps 24-27
STAINLESS STEEL & SANITARY FITTINGS 28
316 STAINLESS STEEL WINE HOSE CONNECTIONS 29
KAMLOCK COUPLINGS 30
BRASS HOSE TAILS 30
BRASS BALL VALVES 30

MISCELLANEOUS

PIPE CLEANING PIGS 31
WASHDOWN GUNS & NOZZLES 32-33
WINEMAKING FITTINGS AND ACCESSORIES 34
NEW!! SEALING SOLUTIONS 35-36
PUMPS & FLOW METERS 37

CAMOZZI PNEUMATIC CYLINDERS & ACCESSORIES 38

ENERPAC AUTHORISED SALES & SERVICE CENTRE 39

The Supplier makes no representation or warranty with respect to the information supplied within. This information is however, as of this date provided, true and accurate to the best of our knowledge, it is offered in good faith but without guarantee. The information provided is not intended to be all-inclusive and actual conditions of use and handling may require considerations of information other than, or in addition to, that provided herein.

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

B.L.Shipway

ESTABLISHED 1953

2019 VINTAGE

ORDER / ENQUIRY FORM

EMAIL: sales@blshipway.com.au - FAX: (08) 8443 6327

Winery: .....

Contact Name: .....

Fax Number: .....

Phone Number: .....

Please quote / supply (delete which does not apply)

HOSE QUANTITY	PRODUCT NUMBER	DESCRIPTION *(if possible)*
Coils		
Coils		
Coils		
Coils		
Coils		
Coils		
Coils		

OTHER PRODUCTS

Order Number *(if ordering)*: .....

Freight Company: .....
(Goods are FOB Adelaide)

Signed: .....

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

B.L.Shipway

ESTABLISHED 1953

2019 VINTAGE

BARFELL™ AUSTRALIAN MADE

PVC SUCTION & DELIVERY HOSES

BARFELL™ AUSTRALIAN MADE

Wine - Claret Food & Beverage

CERTIFIED PHENOL FREE!

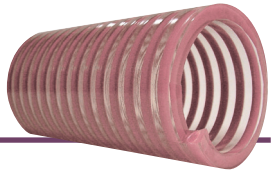

Heavy duty flexible food quality PVC suction/discharge hose reinforced with a rigid spiral. Has a smooth bore to minimise flow losses. Conforms to AS2070 - 1999 and European Directive 2002/72/EC.

Description: Clear with Claret Helix
Temperature Range: -5°C to +60°C
Chemical Resistance: Excellent
Flexibility: Good
Abrasion Resistance: Excellent
UV Resistant: Excellent

Applications

Suitable for the wine, canning and food packaging industries. It can be used for the suction of wine & spirits up to 28% alcohol content. The smooth bore enables easy cleaning and reduces bacteria buildup.

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Weight (Kg/m)	Min Bend Radius (mm)	Coil Lengths (Metres)
206500-2520	25.0	34.0	0.7	100	675	0.60	160	20
206510-3220	32.0	41.0	0.7	100	675	0.71	190	20
206520-3820	38.0	48.0	0.6	85	675	0.82	230	20
206530-5020	50.0	62.0	0.5	75	675	1.20	290	20, 30, 40
206540-6320	63.0	76.0	0.5	75	675	1.73	360	20
206550-7520	76.0	90.0	0.5	75	675	2.29	450	20, 30
206560-10020	102.0	117.0	0.4	60	675	3.33	640	20
206570-12520	127.0	143.0	0.4	60	675	4.58	900	Made to Order
206580-15020	150.0	170.0	0.35	50	675	6.75	1,200	Made to Order

PVC - Wine Transfer

CERTIFIED PHENOL FREE!

High performance wine transfer hose. Lightweight and very flexible compared to rubber hoses. Used by some of the most renowned wineries in SA and designed specifically for BL Shipway. Conforms to AS2070 - 1999 and European Directive 2002/72/EC.

Description:
Outer wall: Yellow with 4 longitudinal red stripes.
Inner wall: White food grade PVC
Temperature Range: -5°C to +60°C
Chemical Resistance: Good
Flexibility: Excellent
Abrasion Resistance: Excellent

Applications

Suitable for wine delivery, fruit juices, mineral water and other aqueous liquid food items.

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Weight (Kg/m)	Min Bend Radius (mm)	Coil Lengths (Metres)
201955-3820	38.0	50.0	1.6	232	1.2	244	20
201960-5020	50.0	64.0	1.6	232	1.64	312	20

EXCLUSIVE TO SHIPWAYS
BEWARE OF IMITATIONS

Reformulated to improve abrasion and kink resistance

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

2019 VINTAGE

PVC SUCTION & DELIVERY HOSES

Spiralite 6250 - Wine Transfer Hose

EXCLUSIVE TO SHIPWAYS

PVC food grade hose manufactured to U.S. F.D.A. specifications.
The nylon reinforcement makes it suitable for suction and pressure applications, whilst the raised PVC external helix reduces friction when dragging the hose.

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Weight (Kg/m)	Min Bend Radius (mm)	Coil Lengths (Metres)
6250-5030	50.0	62.0	0.7	100	710	0.80	127	30.5
6250-7530	76.0	92.0	0.7	100	710	1.59	178	30.5
6250-10030	102.0	120.0	0.5	75	710	2.59	204	30.5

THIS HOSE HAS A 2.8:1 SAFETY FACTOR

Description:	Clear with a white PVC helix
Temperature Range:	-1°C to +60°C
Chemical Resistance:	Excellent
Flexibility:	Excellent
Abrasion Resistance:	Excellent
UV Resistant:	Excellent

Applications

Suitable for the wine, canning and food packaging industries. It can be used for the suction of wine & spirits up to 28% alcohol content.

The glass clear smooth bore enables easy cleaning and reduces bacteria buildup.

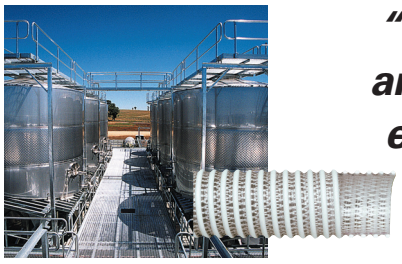

"Released in 2011, the light weight, durability and flexibility of the Spriralite 6250 has quickly enabled it to secure its position as a leader in premium wine transfer hose solutions"

Spiralite 5200 - Spring Sleeve

For use with Spriralite wine transfer hose

White PVC coil which winds into valleys between the helix of the hose.
This provides a smooth clamping/banding surface for all Spiralite wine transfer hose.

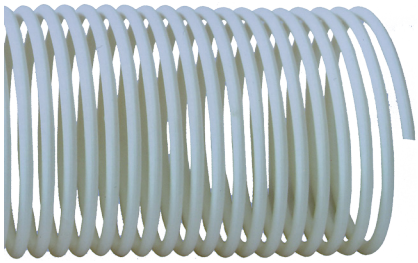

Part Number	Compatibility
6250-50 HELIX	SUITABLE FOR 50mm I.D. HOSE
6250-75 HELIX	SUITABLE FOR 76mm I.D. HOSE
6250-100 HELIX	SUITABLE FOR 102mm I.D. HOSE

ALL SIZES AVAILABLE IN 300mm LENGTHS

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

BARFELL™ AUSTRALIAN MADE

PVC SUCTION & DELIVERY HOSES

BARFELL™ AUSTRALIAN MADE

Standard Food Contact / Milk Tanker

CERTIFIED PHENOL FREE!



A general purpose suction/discharge hose for the transfer of food products, including beer, cider, wine, drinking water and milk. Conforms to AS2070 and European Directive 2002/72/EC. Resistant to chemicals used in cleaning.

Description: Clear with White Rigid PVC Spiral
Temperature Range: -5°C to +60°C
Chemical Resistance: Good
Flexibility: Excellent
Abrasion Resistance: Good

Applications
Suitable for the tanker delivery of milk, other dairy products, drinking water, wine and other food products. The smooth bore enables easy cleaning and reduces bacteria buildup.

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Weight (Kg/m)	Min Bend Radius (mm)	Coil Lengths (Metres)
206400-2520	25.0	32.0	0.7	100	675	0.41	120	20
206410-3220	32.0	39.0	0.7	100	675	0.52	150	20
206420-3820	38.0	46.2	0.6	85	675	0.68	200	20
206430-5020	50.0	60.0	0.5	75	675	1.02	270	20
206440-6320	63.0	74.3	0.5	75	675	1.40	330	20
206450-7520	76.0	89.0	0.4	60	675	2.01	440	20
206460-10020	102.0	116.0	0.4	60	675	3.06	620	20

C View S - Wine Suction

CERTIFIED PHENOL FREE!



An exceptionally flexible, clear suction/discharge hose suitable for food and beverages. The clear rigid helix makes the hose completely transparent. It is UV light stabilised and conforms to AS2070 - 1999 and European Directive 2002/72/EC.

Description: Clear with Clear Rigid PVC Spiral
Temperature Range: -5°C to +60°C
Chemical Resistance: Excellent
Flexibility: Excellent
Abrasion Resistance: Good

Applications
Suction of any fluid that requires a food grade hose including wine and milk. Ideal for wineries, canneries, food processing plants and milk collection and processing plants.

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Weight (Kg/m)	Min Bend Radius (mm)	Coil Lengths (Metres)
206482-2520	25.0	32.0	1.0	145	675	0.43	120	20
206484-3220	32.0	40.6	0.9	130	675	0.65	150	20
206486-3820	38.0	45.6	0.9	130	675	0.70	200	20
206488-5020	50.0	60.2	0.7	102	675	1.05	270	20
206490-6320	63.0	73.5	0.6	87	675	1.44	330	20
206492-7520	75.0	87.8	0.6	87	675	1.98	440	20
206494-10020	100.0	116.6	0.5	73	675	3.14	620	20

C View SP - Wine Suction & Pressure

CERTIFIED PHENOL FREE!



Specifically designed to outperform all other hoses in the beverage industry. Suitable for use with food products, and both suction and delivery applications. It is compliant with both AS2070 and Eurpoean Directive 2002/72/EC, with a plastic helix which will not rust or cut the hands of operators. The only metal-free 76mm wine transfer hose made in Australia.

Description: Clear with Clear Rigid PVC Spiral
Temperature Range: -5°C to +60°C
Chemical Resistance: Excellent
Flexibility: Excellent
Abrasion Resistance: Excellent

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Weight (Kg/m)	Min Bend Radius (mm)	Coil Lengths (Metres)
206000-2530	25.0	35.4	1.2	175	675	0.68	130	30
206005-3830	38.0	49.9	1.2	175	675	1.01	220	30
206010-5030	50.0	64.9	1.0	145	675	1.67	300	30
206012-7520	76.0	92.4	1.0	145	675	2.57	490	20

2019 VINTAGE

PVC SUCTION & DELIVERY HOSES

Plutone PR

CERTIFIED PHENOL FREE!



Food grade hose suited to both suction and delivery. Suitable for the transfer of beer, wine, cider and liquid food products. Made in Italy by the European market leader, meets European directive 90/128/CEE Class A, B and C.

Description: Clear with carbon steel wire helix and polyester yarn reinforcement
Temperature Range: -10°C to +60°C
Chemical Resistance: Excellent
Flexibility: Good
Abrasion Resistance: Good

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Weight (Kg/m)	Min Bend Radius (mm)	Coil Lengths (Metres)
150750225-2560	25.0	35.0	1.55	225	735	0.65	75	60
150750235-3830	38.0	49.0	1.30	185	662	1.08	110	30
150750240-5030	50.0	63.0	0.83	120	588	1.62	120	30
150750260-7530	76.0	91.0	0.6	87	515	2.66	230	30
150750270-10020	102.0	118.0	0.4	58	515	3.80	310	20

PLEASE NOTE: THIS HOSE HAS A 3:1 SAFETY FACTOR

Heli-Steel Suction Hose

PHENOL & DOP/DEHP PHTHALATE FREE!

Food grade hose made in the USA from non-toxic, FDA-approved materials. Suitable for the transfer of beer, wine, cider and liquid food products. Its heavy duty thick-walled construction and steel wire helix provide added strength, while the smooth inner wall prevents blocking during transfer.

Description: Clear with steel wire helix
Temperature Range: -20°C to +55°C
Chemical Resistance: Excellent
Flexibility: Good
Abrasion Resistance: Good

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Nominal Weight (Kg/m)	Coil Lengths (Metres)
HSC-2030	20.0	28.0	0.7	100	710	0.54	30
HSC-2530	25.0	35.0	0.6	84	710	0.71	30
HSC-32**	32.0	44.0	0.6	84	710	1.18	15, 30
HSC-38**	38.0	50.0	0.6	84	710	1.30	15, 30
HSC-50**	50.0	63.0	0.5	70	710	3.73	15, 30

***** INSERT COIL LENGTH***
THIS HOSE HAS A 3:1 SAFETY FACTOR

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

2019 VINTAGE

PVC WASH DOWN & WATERING HOSES

BARFELL™ AUSTRALIAN MADE

BARFELL™ AUSTRALIAN MADE

Estate Bluline



Highly flexible premium wash down hose, also suitable for watering parks and gardens. With high visibility and two distinctive blue stripes, it is kink, burst and UV light resistant.

Description: Inner wall: Black
Outer wall: Smooth white cover with blue stripes

Temperature Range: -5°C to +60°C

Applications

All commercial parks, gardens and turf watering applications. Ideal as a general cold water wash down hose in wineries and dairies.

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Weight (Kg/m)	Coil Lengths (Metres)
201900-13***	12.5	19.0	1.0	145	0.22	20, 100, 200
201910-20***	19.0	26.5	1.0	145	0.40	20, 30, 100
201920-25***	25.0	34.0	1.0	145	0.58	20, 80, 100
201930-32***	32.0	42.5	1.0	145	0.85	20, 30, 100
201940-38***	38.0	49.5	1.0	145	1.11	20, 30, 60

****** INSERT COIL LENGTH 30m LENGTHS ALSO AVAILABLE ON REQUEST***
THIS HOSE HAS A 4:1 SAFETY FACTOR

Hot Wash - White

Highest grade hose for hot washdown use in the food industry. The thermoplastic rubber smooth outer cover is highly resistant to lactic acid and fats. Rated for use at up to 85°C at low pressure.

Description: Inner wall: White
Outer wall: White, with smooth TPR surface

Applications

Hot washdown of all food preparation areas, where wine, fruit juice, milk, fats and other food products are present.

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Weight (Kg/m)	Coil Lengths (Metres)
201560-13***	12.5	19.7	2.0	290	0.28	20, 100
201570-20***	19.0	28.0	1.8	250	0.48	20, 100

****** INSERT COIL LENGTH***
THIS HOSE HAS A 4:1 SAFETY FACTOR

Aquamate II

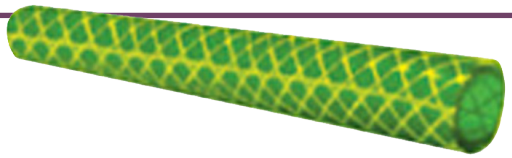

A premium quality, high pressure heavy duty watering, washdown or garden hose with excellent flexibility and kink resistance. With its higher quality construction and excellent resistance to UV light, the hose can be expected to give outstanding service for many years.

Description: Inner wall: Translucent green
Outer wall: Translucent yellow

Applications

General industrial, commercial and domestic use.

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Weight (Kg/m)	Coil Lengths (Metres)
201812-13***	12.5	16.5	1.0	145	0.15	20, 35, 100, 200r
201819-20***	19.0	24.5	1.0	145	0.28	20, 35, 100r
201825-25***	25.0	31.0	1.0	145	0.41	20, 35, 75r

****** INSERT COIL LENGTH***
"r" DENOTES WOODEN REEL
THIS HOSE HAS A 2.4:1 SAFETY FACTOR

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

BARFELL™ AUSTRALIAN MADE

PVC SPECIAL PURPOSE HOSES

BARFELL™ AUSTRALIAN MADE

Air Breathing Hose

Approved braided divers air breathing hose for professional and sports diving. Also suitable for breathing apparatus for tank-cleaning, spray booths and sand blasting. Conforms to AS2299 and AS/NZ1716. Outer cover pricked for added safety, with a low odour inner tube.

Description: Outer wall:
Inner wall: White

Applications
Diving, air breathing applications.

SUITABLE FOR SPARGING

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Weight (Kg/m)	Coil Lengths (Metres)
201600-08***	8.0	14.3	1.6	235	0.14	50, 100, 300r
201610-10***	10.0	17.0	2.5	365	0.22	50, 100, 300r

****** INSERT COIL LENGTH***
THIS HOSE HAS A 4:1 SAFETY FACTOR

PLEASE NOTE:
This product does not have a food grade outer cover. Talk to us about alternative products with food grade inner and outer covers if required.

PVC - Non Toxic - Clear

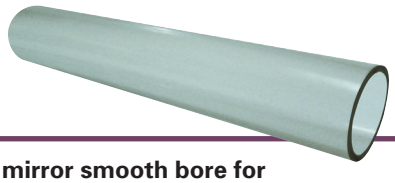

Non toxic tube manufactured to AS2070 - 1999 with excellent clarity, flexibility and mirror smooth bore for low friction flow.

Description: Clear Wall

Applications
Suitable for food and beverage fluids, medical drainage and low pressure general delivery lines.

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Weight (Kg/m)	Coil Lengths (Metres)
204010-0330	3.0	5.0	0.9	125	0.017	30
204020-0430	4.0	7.0	0.8	120	0.035	30
204030-0530	5.0	8.0	0.8	115	0.042	30
204040-0630	6.0	9.0	0.6	90	0.048	30
204050-0830	8.0	11.0	0.5	75	0.061	30
204060-1030	10.0	13.0	0.4	60	0.074	30
204070-1330	12.5	15.5	0.5	70	0.090	30
204080-1630	16.0	19.0	0.4	60	0.113	30
204090-2030	19.0	23.0	0.4	50	0.181	30
204100-2530	25.0	31.0	0.4	50	0.360	30
204110-3230	32.0	38.0	0.3	40	0.452	30
204120-3830	38.0	46.0	0.3	40	0.712	30
204140-5015	50.0	60.0	0.3	40	1.165	15

LONGER LENGTHS AVAILABLE ON REQUEST

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

2019 VINTAGE

BARFELL™ AUSTRALIAN MADE

PVC MULTI-PURPOSE HOSES

BARFELL™ AUSTRALIAN MADE

Super Ultraflex®

General purpose air and water hose with highly distinctive yellow and blue striping, optimum flexibility, resilient and kink resistant. Exceeds AS/NZ2554 Class B for burst pressure, wall thickness, abrasion resistance, weathering resistance, low temperature flexibility, ozone resistance and bond strength. Ideal for brine lines down to -10°C temperature.

Description:
Outer wall: Yellow with blue striping
Inner wall: Black
Temperature Range: -10°C to +60°C
Chemical Resistance: Good
Flexibility: Excellent
Abrasion Resistance: Good

Applications
Suitable for general purpose air and water supply. Also suitable for the conveyance of liquids, gases and some chemicals. Ideal for high pressure air lines and compressors.

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Weight (Kg/m)	Coil Lengths (Metres)
201650-06***	6.0	12.8	2.0	290	0.10	20, 100s, 300s
201652-08***	8.0	14.8	2.0	290	0.16	20, 100s, 300r
201654-10***	10.0	16.6	2.0	290	0.17	20, 100, 300r
201656-13***	12.5	19.3	2.0	290	0.19	20, 100, 250
201658-20***	20.0	29.0	1.6	230	0.45	20, 100
201660-25***	25.0	34.6	1.6	230	0.62	20, 100
201662-32***	32.0	43.4	1.6	230	1.15	20, 60
201664-38***	38.0	50.6	1.6	230	1.56	20, 40
201666-50***	50.0	64.6	1.6	230	2.40	20, 40

****** INSERT COIL LENGTH***
THIS HOSE HAS A 4:1 SAFETY FACTOR
"s" DENOTES PLASTIC SPOOL
"r "DENOTES WOODEN REEL

TMP II®

The hose is highly flexible but kink resistant with a highly distinctive dual striping. A translucent multi purpose food contact hose. It meets AS2070 - 1999, with a food contact inner and outer covering.

Description:
Outer wall: Clear with yellow & blue stripes
Inner wall: Clear

Applications
Suitable for air, water, food and beverage liquids, semi liquids and petroleum based products.

SUITABLE FOR SPARGING

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Weight (Kg/m)	Coil Lengths (Metres)
201105-06***	6.0	10.2	1.4	200	0.08	20, 100s 300r
201108-08***	8.0	12.4	1.4	200	0.10	20, 100s 300r
201111-10***	10.0	15.0	1.4	200	0.14	20, 100s, 300r
201151-13***	12.5	18.1	1.4	200	0.19	20, 100, 250r
201156-16***	16.0	22.8	1.4	200	0.30	20, 100
201161-20***	20.0	27.6	1.4	200	0.40	20, 100
201166-25***	25.0	33.4	1.2	200	0.54	20, 100
201175-32***	32.0	41.8	1.2	175	0.97	20, 60
201186-38***	38.0	49.8	1.2	175	1.32	20, 40
201188-50***	50.0	64.2	0.9	131	2.12	20, 40

****** INSERT COIL LENGTH***
THIS HOSE HAS A 4:1 SAFETY FACTOR
"s" DENOTES PLASTIC SPOOL
"r "DENOTES WOODEN REEL

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

NEW PRODUCTS

2019 VINTAGE

ECONOMICAL PVC SUCTION HOSES

Optima PP6705 PVC Wine Suction



Suction and delivery hose designed for transfer of wine (up to 28% alcohol), fruit juice and dairy products. Its smooth clear wall allows for good visibility to identify possible blockages. A good, lower-cost alternative, whilst still being phenol free and AS2070-compliant.

Description:

Outer wall: Clear PVC with red PVC helix

Inner wall: Clear PVC

Temperature Range: -5°C to +60°C.

Applications

Designed for delivery and suction of wine (up to 28% alcohol), also suitable for fruit juice and dairy products.

OPTIMA®

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Min. Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (Metres)
PP6705-2520	25.0	31.9	0.90	130	624	120	0.40	20
PP6705-3820	38.0	46.1	0.70	102	624	200	0.72	20
PP6705-5020	50.0	60.2	0.60	87	624	250	1.08	20
PP6705-6320	63.0	75.0	0.60	87	624	300	1.55	20
PP6705-7520	76.0	89.6	0.52	76	624	450	2.30	20
PP6705-10020	102.0	116.0	0.40	58	624	600	3.20	20

THIS HOSE HAS A 3:1 SAFETY FACTOR

Lightweight FDA Suction Hose

An extremely flexible, lightweight medium-duty Food Grade PVC suction/discharge hose, reinforced with a Rigid PVC spiral. It has a mirror smooth bore for ease of cleaning & to minimise friction losses. Manufactured using AS2070 and FDA compliant materials, tested to European std 2002/72/EC, which incorporates testing for plasticiser migration.

Description:

Outer wall: Clear PVC with blue PVC helix

Inner wall: Clear PVC

Temperature Range: -5°C to +60°C.

Applications

Suitable for the transfer of most food grade products where there is a requirement for the hose material to be FDA-compliant. It is also an excellent medium duty general purpose suction and delivery hose.

BARFELL™

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Min. Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (Metres)
206360-2020	19.0	24.9	0.70	100	675	55	0.24	20
206361-2520	25.0	31.0	0.70	100	675	75	0.37	20
206362-3220	32.0	37.8	0.70	100	675	100	0.44	20
206363-3820	38.0	46.2	0.60	85	675	140	0.56	20
206365-5020	51.0	58.8	0.50	70	675	200	0.85	20
206366-6320	64.0	72.3	0.50	70	675	240	1.18	20
206367-7520	76.0	85.6	0.40	55	675	350	1.42	20
206368-10020	102.0	114.2	0.40	55	675	400	2.52	20

THIS HOSE HAS A 3:1 SAFETY FACTOR

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

2019 VINTAGE

RYCO® RUBBER WINE HOSES RYCO®

A range of high performance, cost effective rubber hoses.

Rubber Brewers Delivery Hose

Premium quality rubber brewers delivery hose, compliant with US FDA regulations. Flexible, durable and lightweight with non-marking abrasion resistant outer cover.

Description:
- Outer wall: Red
- Inner wall: White EPDM FDA food grade

Temperature Range: -30°C to +100°C

Construction: Reinforced with 4 plies of high tensile synthetic cords

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Weight (Kg/m)	Min Bend Radius (mm)	Coil Lengths (Metres)
RBD16-2520	25.4	38.0	1.2	175	0.88	145	20
RBD20-3220	31.8	44.0	1.2	175	1.20	180	20
RBD24-3820	38.0	50.0	1.2	175	1.38	210	20
RBD32-5020	51.0	66.0	1.2	175	2.14	320	20
RBD40-6320	63.5	78.0	1.0	150	2.44	340	20
RBD48-7520	75.0	92.0	1.0	150	2.96	420	20
RBD64-10020	102.0	119.0	1.0	150	4.33	605	20

THIS HOSE HAS A 3:1 SAFETY FACTOR

Applications

Suitable for delivery of wine, beer, cider, vinegar, vegetable oil, fruit and vegetable juices. The hose was developed to withstand the tough conditions of the Australian wine and beverage industries.

Rubber Brewers Suction Hose

Premium quality rubber brewers suction hose, compliant with US FDA regulations. Flexible, durable and lightweight, with non-marking abrasion resistant cover. Suitable for both suction and delivery.

Description:
- Outer wall: Red
- Inner wall: Smooth non-porous white EPDM FDA food grade

Temperature Range: -25°C to +95°C

Construction: Reinforced with 4 plies of high tensile synthetic cords

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Weight (Kg/m)	Min Bend Radius (mm)	Coil Lengths (Metres)
RBS16-2520	25.4	37.0	1.2	175	880	0.97	110	20
RBS20-3220	31.8	45.0	1.2	175	880	1.32	165	20
RBS24-3820	38.0	52.0	1.2	175	880	1.59	180	20
RBS32-5020	51.0	66.0	1.2	175	880	2.30	290	20
RBS40-6320	63.5	82.0	1.2	175	880	2.68	380	20
RBS48-7520	75.0	93.0	1.0	150	880	3.84	425	20
RBS64-10020	102.0	120.0	1.0	150	880	6.00	560	20

THIS HOSE HAS A 3:1 SAFETY FACTOR

Applications

Suitable for suction and delivery of wine, beer, cider, vinegar, vegetable oil, fruit and vegetable juices. Developed to withstand the tough conditions of the Australian wine and beverage industries.

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

2019 VINTAGE

TRELLEBORG

RUBBER WINE HOSES

TRELLEBORG

Premium Quality, longer-lasting, Phthalate-Free Rubber Wine Hose

BL Shipway is now the proud distributor of Trelleborg Food Grade Hoses in South Australia.
Made in France, this company is widely regarded as being amongst the most advanced rubber product manufacturers in the world, and their wine hose is no exception.
All hoses below are 100% Phthalate-free, and each has been tested to the highest European Standards.

Millesime Transfer / Steam Hose

**Specifically designed for road tankers of liquid foodstuffs, this is also excellent as a steam hose for cleaning and for suction and delivery of wine and other liquids. Offers good flexibility, weather-resistant cover.
Its smooth, white food-grade tube is resistant to detergents and can withstand steam at up to 140°C.**

Description:
Outer wall: Weather-resistant ethylene propylene rubber (EPDM)
Inner wall: Smooth, white, pththalate-free food grade EPDM
Temperature Range: -30°C to +100°C. Will withstand steam at max. 140°C.
Reinforcement: Synthetic textile with embedded steel helix

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Min. Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (Metres)
MILLESIME-3840	38.0	49.0	1.0	145	670	80	1.15	40
MILLESIME-5040	51.0	62.5	1.0	145	670	105	1.66	40
MILLESIME-6340	63.0	74.5	1.0	145	670	130	2.00	40
MILLESIME-7540	76.0	88.5	1.0	145	670	165	2.95	40
MILLESIME-10040	100.0	113.0	1.0	145	670	380	3.75	40
MILLESIME-12540	125.0	145.5	1.0	145	670	480	7.20	40
MILLESIME-15040	150.0	171.5	1.0	145	670	570	8.80	40

THIS HOSE HAS A 3:1 SAFETY FACTOR

Applications
For suction & delivery of wine, beer, cider and other liquid foodstuffs such as milk and fruit juice, and alcohol up to 96%. Specifically engineered for tank-to-tank wine transfer, unloading bays and for liquid foodstuff tankers. Not suited to fatty and oil-based liquids. Also can be used for steam at up to 140°C.

Vendange Transfer Hose

Delivery hose ideal for tank-to-tank transfer. Identical composition to the Trellvin hose above, but the absence of any reinforcing helix makes it more flexible, perfect for transfer and loading of grapes and skins. Its smooth, white food-grade tube is also resistant to detergents and can withstand temperatures up to 130°C for several minutes for CIP purposes (Cleaning in Place).

Description:
Outer wall: Ribbed red polymer
Inner wall: Smooth, white, pththalate-free food grade natural rubber
Temperature Range: -30°C to +100°C. Will withstand steam at max. 110°C.
Reinforcement: Synthetic textile with embedded steel helix

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Min. Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (Metres)
VENDANGE-10040	100.0	117.0	0.6	87	140	3.32	40
VENDANGE-12540	125.0	142.5	0.6	87	170	4.10	40
VENDANGE-15040	150.0	167.5	0.6	87	200	4.97	40

THIS HOSE HAS A 3:1 SAFETY FACTOR

Applications
Specially designed for transfer of fresh grapes.

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

2019 VINTAGE

TRELLEBORG

RUBBER WINE HOSES

TRELLEBORG

Premium Quality, longer-lasting, Phthalate-Free Rubber Wine Hose

BL Shipway is now the proud distributor of Trelleborg Food Grade Hoses in South Australia.
Made in France, this company is widely regarded as being amongst the most advanced rubber product manufacturers in the world, and their wine hose is no exception.
All hoses below are 100% Phthalate-free, and each has been tested to the highest European Standards.

Vinitrell Wine Transfer Hose

Suction and delivery hose specially engineered for wine transfer, but suitable for transfer of any foodstuff except fatty / oily liquids. Offers outstanding flexibility, easier handling and less drag, thanks to its slick, hard-wearing, non-marking polymer-based cover. Its smooth, white food-grade tube is also resistant to detergents and can withstand steam-cleaning at 110°C for up to 10 minutes for CIP purposes (Cleaning In Place).

Description:
- Outer wall: Non-marking red polymer
- Inner wall: Smooth, white, phthalate-free food grade natural rubber (NR)

Temperature Range: -30°C to +80°C. Will withstand up to 10 minutes at 110°C for CIP.

Reinforcement: Synthetic textile with embedded steel helix

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Min. Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (Metres)
VINITRELL-5040	50.0	65.0	1.0	145	670	100	1.57	40
VINITRELL-6340	63.0	77.0	1.0	145	670	130	1.87	40
VINITRELL-7540	75.0	92.0	1.0	145	670	150	2.54	40

THIS HOSE HAS A 3:1 SAFETY FACTOR

Applications

Specifically engineered for wine and alcoholic beverage transfer, but also suited to suction and delivery of any foodstuff (excluding fatty and oil-based liquids).

Alcodial Alcohol Transfer Hose

Very flexible kink-resistant wine transfer hose, particularly adapted to handle alcohol up to 99%. Ideal for distilleries, brandy and spirit transfer. Also able to be used as a cold drinking water transfer hose, as approved by British authorities. Completely odor and taste free inner tube.

Description:
- Outer wall: Non-marking, blue natural rubber
- Inner wall: Smooth, white, phthalate-free ultra-high weight polyethylene (UPE)

Temperature Range: -30°C to +80°C.

Reinforcement: Synthetic textile with embedded steel helix

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Min. Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (Metres)
ALCODIAL-2540	25.0	36.0	1.0	145	670	55	0.7	40
ALCODIAL-3840	38.0	49.0	1.0	145	670	84	1.1	40
ALCODIAL-5040	51.0	62.5	1.0	145	670	112	1.76	40
ALCODIAL-6340	63.0	74.5	1.0	145	670	139	2.08	40
ALCODIAL-7540	76.0	89.0	1.0	145	670	167	2.94	40

THIS HOSE HAS A 3:1 SAFETY FACTOR

Applications

Designed specifically to allow transfer of alcohol up to 99%. Suitable for suction and delivery of all drinks and alcoholic beverages.

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

2019 VINTAGE

TRELLEBORG

RUBBER WINE HOSES

TRELLEBORG

Premium Quality, longer-lasting, Phthalate-Free Rubber Wine Hose

BL Shipway is now the proud distributor of Trelleborg Food Grade Hoses in South Australia.
Made in France, this company is widely regarded as being amongst the most advanced rubber product manufacturers in the world, and their wine hose is no exception.
All hoses below are 100% Phthalate-free, and each has been tested to the highest European Standards.

Trellvin Wine Transfer Hose

Suction and delivery hose specially designed for tank-to-tank transfer. Offers great flexibility, excellent resistance to kinking, and will return to shape after accidental squeezing. Its smooth, white food-grade tube is also resistant to detergents and can withstand temperatures up to 130°C for several minutes for CIP purposes (Cleaning in Place).

Description:
Outer wall: Weather-resistant ethylene propylene rubber (EPDM)
Inner wall: Smooth, white, pththalate-free food grade EPDM
Temperature Range: -30°C to +100°C. Will withstand several minutes at 130°C for CIP.
Reinforcement: Synthetic textile with embedded PET helix

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Min. Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (Metres)
TRELLVIN-3840	38.0	50.0	1.0	145	520	150	1.18	40
TRELLVIN-5040	50.0	62.0	1.0	145	520	200	1.48	40
TRELLVIN-6340	63.0	75.5	1.0	145	520	315	2.10	40
TRELLVIN-7540	75.0	88.0	1.0	145	520	375	2.46	40

THIS HOSE HAS A 3:1 SAFETY FACTOR

Applications
For suction & delivery of wine, beer, cider and other liquid foodstuffs such as milk and fruit juice, and alcohol up to 96%. Specifically engineered for tank-to-tank wine transfer, unloading bays and for liquid foodstuff tankers.

Trellvin L Layflat Wine Hose

Delivery hose ideal for tank-to-tank transfer. Identical composition to the Trellvin hose above, but the absence of any reinforcing helix makes it more flexible, perfect for transfer and loading of grapes and skins. Its smooth, white food-grade tube is also resistant to detergents and can withstand temperatures up to 130°C for several minutes for CIP purposes.

Description:
Outer wall: Weather-resistant EPDM
Inner wall: Smooth, white, pththalate-free food grade EPDM
Temperature Range: -30°C to +100°C. Will withstand several minutes at 130°C for CIP.
Reinforcement: Synthetic textile

Applications
For delivery of wine, beer, cider and other liquid foodstuffs such as milk and fruit juice, and alcohol up to 96%. Specifically engineered for tank-to-tank wine transfer, unloading bays and for liquid foodstuff tankers.

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Weight (Kg/m)	Coil Lengths (Metres)
TRELLVIN L-3840	38.0	49.0	1.0	145	0.93	40
TRELLVIN L-5040	50.0	61.5	1.0	145	1.24	40
TRELLVIN L-6340	63.0	74.5	1.0	145	1.49	40
TRELLVIN L-7540	75.0	88.0	1.0	145	1.99	40
TRELLVIN L-10040	100.0	114.0	1.0	145	2.63	40
TRELLVIN L-12540	125.0	140.0	1.0	145	4.23	40
TRELLVIN L-15040	150.0	165.0	1.0	145	4.97	40

THIS HOSE HAS A 3:1 SAFETY FACTOR

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

NEW PRODUCT

2019 VINTAGE

RUBBER WINE HOSES

TRELLEBORG

Premium Quality, longer-lasting, Phthalate-Free Rubber Wine Hose

BL Shipway is now the proud distributor of Trelleborg Food Grade Hoses in South Australia.
Made in France, this company is widely regarded as being amongst the most advanced rubber product manufacturers in the world, and their wine hose is no exception.

All hoses below are 100% phthalate-free, and each has been tested to the highest European standards.

Food 10 Hot Delivery Hose

Top quality rubber delivery hose with FDA compliant synthetic rubber tube. Offers Trelleborg standard product at a more economical price point, reduced weight and higher temperature range than many other entry-level hoses.

Description:
- Outer wall: Weather-resistant synthetic rubber
- Inner wall: Smooth, white, first grade synthetic rubber

Temperature Range: -30°C to +100°C.

Reinforcement: Synthetic textile

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Min. Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (Metres)
FOOD10D-3840	38.0	49.0	1.0	145	380	0.93	40
FOOD10D-5040	51.0	63.0	1.0	145	510	1.34	40
FOOD10D-7540	76.0	88.0	1.0	145	760	1.92	40

THIS HOSE HAS A 3:1 SAFETY FACTOR

Food 10 Hot Suction & Delivery Hose

Top quality FM compliant hose, suitable for suction and delivery. Offers Trelleborg standard product at a more economical price point, reduced weight and higher temperature range than many other entry-level hoses.

Description:
- Outer wall: Weather-resistant synthetic rubber
- Inner wall: Smooth, white, food grade synthetic rubber

Temperature Range: -30°C to +100°C.

Reinforcement: Synthetic textile with embedded steel helix

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Min. Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (Metres)
FOOD10SD-3840	38.0	50.0	1.0	145	675	160	1.20	40
FOOD10SD-5040	51.0	64.0	1.0	145	675	200	1.65	40
FOOD10SD-7540	76.0	90.0	1.0	145	675	320	2.77	40

THIS HOSE HAS A 3:1 SAFETY FACTOR

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

2019 VINTAGE

TRELLEBORG

RUBBER WINE HOSES

TRELLEBORG

Premium Quality, longer-lasting, Phthalate-Free Rubber Wine Hose

BL Shipway is now the proud distributor of Trelleborg Food Grade Hoses in South Australia.
Made in France, this company is widely regarded as being amongst the most advanced rubber product manufacturers in the world, and their wine hose is no exception.

Citerdial Transfer Hose

Ideal for milk handling and transfer, this is also suitable for suction and delivery of wine, beer and other liquids (with the exception of fatty foodstuffs and oils). Extremely flexible and kink-resistant, with an abrasion-resistant cover. Its smooth, white food-grade tube is resistant to detergents and can withstand steam at up to 110°C for up to 10 minutes to allow CIP purposes (Cleaning in Place).

Description:

Outer wall: Weather-resistant natural rubber (NR)

Inner wall: Smooth, white, pththalate-free food grade NR

Temperature Range: -30°C to +80°C. Will withstand steam at max. 110°C.

Reinforcement: Synthetic textile with embedded steel helix

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Min. Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (Metres)
CITERDIAL-3840	38.0	49.0	0.6	87	670	76	1.14	40
CITERDIAL-5040	51.0	63.0	0.6	87	670	102	1.79	40
CITERDIAL-6340	63.0	75.0	0.6	87	670	126	2.17	40
CITERDIAL-7540	76.0	89.5	0.6	87	670	152	3.03	40
CITERDIAL-10040	100.0	114.0	0.6	87	670	350	3.67	40
CITERDIAL-12540	125.0	145.5	0.6	87	670	450	6.05	40
CITERDIAL-15040	150.0	171.5	0.6	87	670	530	7.02	40

THIS HOSE HAS A 3:1 SAFETY FACTOR

Applications

For suction & delivery of wine, beer, cider and other liquid foodstuffs such as milk and fruit juice, and alcohol up to 96%. Will handle detergents and steam cleaning at up to 110°C. Not suited to fatty foodtsuffs and oils.

Milk Tanker Hose

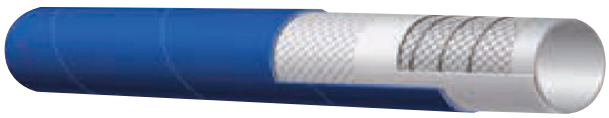

Ideal for liquid food suction and delivery. Specially constructed for maximum flexibility in milk tanker applications, which makes it the highest and most flexible rubber hose in our range in most sizes. Can be sterilised with 5% sodium solution. Fully complies with the requirements listed in FDA CFR 21 specifications and the general requirements listed in the EN 1935/2004, particularly to the specific requirements defined.

Description:

Outer wall: Blue NR/EPDM - abrasion and ozone resistant

Inner wall: White NR

Temperature Range: -40°C to +80°C.

Reinforcement: High tensile textile cords with embedded steel helix wire

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Min. Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (Metres)
BFSH-2540	25.0	35.0	1.0	150	775	50	0.730	40
BFSH-3840	38.0	48.0	1.0	150	775	76	1.040	40
BFSH-5040	51.0	61.0	1.0	150	775	100	1.420	40
BFSH-6340	63.0	75.0	1.0	150	775	126	2.010	40
BFSH-7540	76.0	88.0	1.0	150	698	228	2.590	40
BFSH-10040	102.0	116.0	1.0	150	698	306	3.850	40

THIS HOSE HAS A 3:1 SAFETY FACTOR

Applications

Liquid food suction and delivery.

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

RUBBER WINE HOSES

Vintner - Heavy Duty, Rubber Suction and Delivery Hose

Premium quality rubber brewers suction and delivery hose. Hard wearing, abrasion resistant and heavy duty construction. FDA/USDA compliant and conforms to 3-A sanitary standard 18-03.

Description:
- Outer wall: Grey Versigard®
- Inner wall: White Chlorobutyl

Temperature Range: -34°C to +104°C

Construction: Reinforced with spiral-plied synthetic fabric with monofilament helix

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Weight (Kg/m)	Min Bend Radius (mm)	Coil Lengths (Metres
VINTNER-2530	25.4	41.1	1.7	250	686	1.06	76	30
VINTNER-3830	38.1	53.6	1.7	250	686	1.46	102	30
VINTNER-50**	50.8	68.1	1.7	250	686	2.05	178	30, 60
VINTNER-6330	63.5	81.5	1.7	250	686	2.65	254	30
VINTNER-7530	76.2	97.8	1.7	250	686	3.86	305	30

***** INSERT COIL LENGTH***

Applications

For handling in-plant and/or tank truck transfer of wine, beer, cider, potable water and other non-oil-based liquid foodstuffs.

Vinoflex Suction and Delivery Hose

Premium quality rubber brewers suction hose, manufactured for non-fatty foods with non-marking abrasion resistant outer cover. Hard wearing, heavy duty suction and delivery hose. Compliant with FDA title 21, article 177.2600 for aqueous foods, and BfR XXI Cat. 2 for aqueous and fatty foods.

Description:
- Outer wall: Red corrugated, translucid thermoplastic material with low friction coefficient, weather resistant
- Inner wall: White, smooth, food quality, taste free and odourless IIR rubber

Temperature Range: -40°C to +120°C

Construction: High strength synthetic cord plus steel helix wire

Part Number	Nominal I.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Vacuum Rating (mmHg)	Weight (Kg/m)	Min Bend Radius (mm)	Coil Lengths (Metres
VINOFLEX-3820	38.0	1.0	150	450	1.17	120	20
VINOFLEX-5020	51.0	1.0	150	450	1.45	150	20
VINOFLEX-7520	76.0	1.0	150	450	2.29	225	20

THIS HOSE HAS A 3:1 SAFETY FACTOR

Applications

Hardwall corrugated hose, lightweight and flexible, for the suction and delivery of vintage wines and alcohols at 96°C, odourless and taste free. Designed especially for applications in wine cellars, breweries and distilleries, where a low amount of friction is required when the hose is being dragged on the floor. Will withstand a maximum of 130°C for 15 minutes with steam, and a maximum of 60°C for 15 minutes with nitric, peracetic or phosphoric acid (all at 2%), or caustic soda (at 5%).

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

RUBBER HOSES

Optima PP5500 Hot White Washdown

Optima PP5500 Whitewash is a high quality, multi-purpose hose for carrying hot water up to 100°C at 300 psi or open ended steam applications up to 120 psi. Excellent for washing out storage/processing areas as the water being conveyed will not be contaminated by the hose. Also suitable for conveying hot or cold beverages and food products.

Description:
- Outer wall: White smooth finish EDPM blend
- Inner wall: White EPDM blend FDA food grade rubber
- Temperature Range: -25°C to +120°C
- Construction: 2 high tensile textile braids

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Maximum Working Pressure (Mpa)	Maximum Working Pressure (psi)	Minimum Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (Metres)
PP5500-13***	12.5	24.0	1.4	200	155	0.52	20, 100
PP5500-20***	19.0	33.0	1.4	200	225	0.97	20, 100
PP5500-2580	25.0	39.0	1.4	200	320	1.17	80

****** INSERT COIL LENGTH***

RYCO® Multi Purpose MP1

NON-CONDUCTIVE

Ryco MP1 hose is a high quality, non-conductive, economical and versatile hose, with textile reinforcement for additional strength and flexibility. Recommended for air, water, petroleum oils and fuel oils. It has excellent weather and ozone resistance and is suitable for use in brine lines.

Description:
- Outer wall: Red, oil and abrasion resistant modified nitrile
- Inner wall: Black, oil resistant, Class A nitrile
- Temperature Range: Air, water and lubricating oils: -40°C to +95°C; Petrol, kerosene and fuel oils: -40°C to +49°C
- Construction: Single braid textile reinforcement

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Working Pressure (Mpa)	Working Pressure (psi)	Minimum Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (Metres)
MP14-06***	6.0	13.5	1.4	200	50.0	0.15	20, 50, 100
MP16-10***	10.0	17.5	1.4	200	75.0	0.23	20, 50, 100
MP18-13***	13.0	21.4	1.4	200	100.0	0.31	20, 50, 100
MP112-20***	20.0	28.6	1.4	200	125.0	0.49	20, 50, 100
MP116-25***	25.0	37.3	1.4	200	200.0	0.80	20, 50, 100
MP120-32***	32.0	43.9	1.4	200	230.0	1.00	20 or cut length

****** INSERT COIL LENGTH***
THIS HOSE HAS A 4:1 SAFETY FACTOR

RYCO® AWD

SUITABLE FOR BRINE AND WASHDOWN USE



Ryco AWD is a very versatile air or water delivery hose to maximum pressures of 150 psi and is suited to be used in various applications including industrial, earthwork construction, mining agriculture etc; wherever air or water needs to be transferred in external or internal applications. It has a smooth general purpose tube, high strength yarn reinforecement and a long lasting cover with good ozone and abrasion resistance capabilities, for harsh environmental conditions.

Description:
- Outer wall: Black, wrapped cover (Blended NR/EPDM, wrapped impression finish)
- Inner wall: Black, smooth synthetic rubber (Blended NR/SBR)
- Temperature Range: -30°C to +80°C
- Construction: High tensile synthetic yarn reinforcement

Part Number	Nominal I.D. (mm)	Nominal O.D. (mm)	Max. Working Pressure (Mpa)	Max. Working Pressure (psi)	Min. Burst Pressure (Mpa)	Min. Burst Pressure (psi)	Minimum Bend Radius (mm)	Weight (Kg/m)	Coil Lengths (Metres)
AWD12-2020	19.1	29.0	1.0	150	3.0	450	228.0	0.65	20, 30
AWD16-2520	25.4	35.0	1.0	150	3.0	450	300.0	0.97	20, 30
AWD20-3220	31.8	42.0	1.0	150	3.0	450	384.0	1.20	20, 30
AWD24-3820	38.1	48.0	1.0	150	3.0	450	456.0	1.37	20, 30
AWD32-5020	50.8	63.0	1.0	150	3.0	450	612.0	1.85	20, 30
AWD40-6320	63.5	79.0	1.0	150	3.0	450	756.0	2.25	20, 30
AWD48-7520	76.2	92.0	1.0	150	3.0	450	912.0	3.60	20, 30

THIS HOSE HAS A 3:1 SAFETY FACTOR

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

Heat Shrink Tubing

Commonly used for securing electrical wiring, this product also provides a protective layer over band-strapped hose ends, reducing the risk of hand injuries for cellarhands, or for hose identification.

Offers a shrink ratio of 2:1, good-chemical and fungal resistance and UV-stabilised. Available in a range of colours to allow you to easily identify suction from discharge, white from red, etc.

Part Number	Tube O.D. (mm)	Shrinks to (mm)	Length (m)
HS76x38MM**x1.2M	76.0	38.0	1.2
HS76x38MM**x25M	76.0	38.0	25.0
HS100x50MM**x1.2M	100.0	50.0	1.2
HS100x50MM**x25M	100.0	50.0	25.0
HS120x60MM**x1.2M	120.0	60.0	1.2
HS120x60MM**x15M	120.0	60.0	15.0

Note: **"**" Denotes Colour - BK = BLACK, YL = YELLOW, BL = BLUE, GR = GREEN, RD = RED, WH = WHITE**
Please specify desired colour when ordering.
CUT LENGTHS ARE ALSO AVAILABLE ON REQUEST, SUBJECT TO AVAILABILITY.
****HEAVY-DUTY PRODUCT WITH THICKER WALL AND ADHESIVE LINING ALSO AVAILABLE ON REQUEST.***

RSG Spiral Guard (Black)
RSGY Spiral Guard (Yellow)

Recommended for: Lightweight cost-effective protection of hoses and cables from abrasion and impact. It can also be used to bundle hoses together in groups.

Construction: Black or yellow polyethylene, plastic spiral, with rounded edges to protect hose cover. Polyethylene is not affected by exposure to air, water, hydraulic oil and many other fluids.

Temperature Range: From -40°C to +120°C (-40°F to 250°F).

Assembly Instructions: RYCO Spiral Guard can be applied easily after hose assembly because of its spiral form. Simply place one end of the completed hose assembly in a vice, then wrap the coil onto the hose.

It is recommended to choose a RYCO Spiral Guard size that it is a tight fit on the hose, in order to keep the Spiral Guard in place.

The Spiral Guard expands to fit the hose or hose bundle. Allow extra length of Spiral Guard to accommodate for this expansion.

Stock Lengths: -50L to -90L available in 20 metre lengths
-110L available in 10 metre lengths

Part Number	Approx Hose OD (mm)	Spiral Guard ID (mm)
RSG-50L or RSGY-50L	50.0	44.0
RSG-63L or RSGY-63L	63.0	56.0
RSG-75L or RSGY-75L	75.0	67.0
RSG-90L or RSGY-90L	90.0	82.0
RSG-110L or RSGY-110L	110.0	100.0

Note: **RSG = BLACK & RSGY = YELLOW**
Some sizes also available in Blue and Red.

TO ORDER OR FOR MORE INFORMATION CONTACT:
B.L.Shipway
ESTABLISHED 1953
217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au
SOUTH AUSTRALIA
Certified System
Quality
ISO 9001
SAI GLOBAL

NEW PRODUCT

2019 VINTAGE

HOSE HANDLES

EXCLUSIVE TO BL SHIPWAY IN SA

A ground breaking safety tool for shifting hose or pipe in any industry and under any conditions.

Part Number	Hose I.D. (mm)	Hose O.D. (mm)
300SUC	75.0	94.0
400SUC	100.0	114.0

Larger sizes available on request.

Safe lifting capacity of 180kg with a breaking point of 150kg.

The easy-to-use mechanism enables you to clamp onto hose or pipe easily and allows you to safely grip, torque and replace single-handedly, through a natural fluid movement.

PURPOSE-BUILT FOR WHS REQUIREMENTS

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

2019 VINTAGE

HOSE ASSEMBLIES

A wide range of hose assemblies are available to meet your requirements.

Assemblies consist of:

- Hose (rubber or PVC in sizes from 25 - 150mm).
- Stainless Steel Fittings on each end of your choice, including:
  - BSM (RJT)
  - BSM CIP
  - Buttweld
  - Tri-clover.
- Externally Swaged or Double Clamping on each end using preformed stainless steel BANDIMEX clamps.
- Externally Swaged assemblies can be pressure tested and supplied complete with test certificate if required.



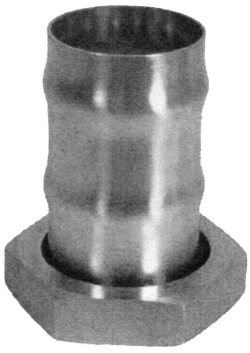

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

BANDIMEX UNIVERSAL HOSE AND PIPE CLAMPS

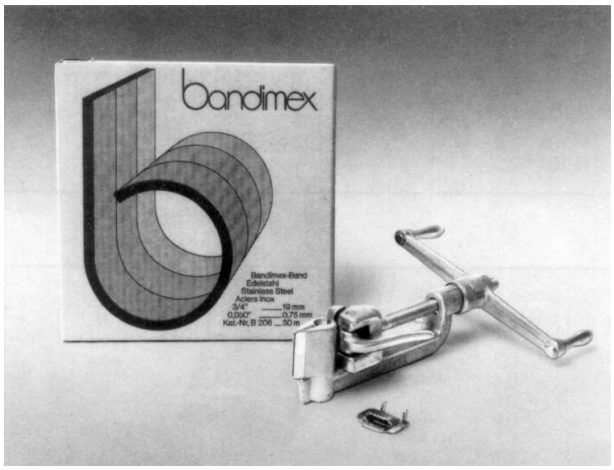

Using the BANDIMEX tool and a roll of BANDIMEX band and BANDIMEX buckles, a clamp fitting each diameter and each shape can easily and quickly be applied at low cost to clamp all types of hose, fix signs and boards to poles, pipe mounting, and many other fastening applications.

BANDIMEX TOOL

Part Number		kg
W 001	Tool tensioning capability over 1t	2.00
W 006	Replacement handle and screw	0.57
W 016	Replacement ball bearing	0.03
W 043	Close quarter tension nut	0.06

BANDIMEX BAND full round edge

SS-CrNi	SS-CrNiMo	Width	Thickness	Roll Length
B 202	B 402	6.4 mm - 1/4″	0.50 mm - 0.020″	30m
B 203	B 403	9.5 mm - 3/8″	0.64 mm - 0.025″	30m
B 204	B 404	12.7 mm - 1/2″	0.75 mm - 0.030″	30m
B 205	B 405	16.0 mm - 5/8″	0.75 mm - 0.030″	30m
B 206	B 406	19.0 mm - 3/4″	0.75 mm - 0.030″	30m
B 803*		9.5 mm - 3/8″	0.64 mm - 0.025″	30m
B 804*		12.7 mm - 1/2″	0.75 mm - 0.030″	30m
B 805*		16.0 mm - 5/8″	0.75 mm - 0.030″	30m
B 806*		19.0 mm - 3/4″	0.75 mm - 0.030″	30m

NEW PLASTIC CARRY BASKET (REUSABLE)

BANDIMEX BUCKLES for single or double BANDIMEX band

SS-CrNi	SS-CrNiMo	For Band Width	Qty per Box
S 252	S 452	6.4 mm - 1/4″	100
S 253	S 453	9.5 mm - 3/8″	100
S 254	S 454	12.7 mm - 1/2″	100
S 255	S 455	16.0 mm - 5/8″	100
S 256	S 456	19.0 mm - 3/4″	100



BANDIMEX SCRU-BUCKLES for retensioning clamps - easily applied SS

	For Band Width	Qty per Box
S 720	6.4 mm - 1/4″	50
S 720	9.5 mm - 3/8″	50
S 720	12.7mm - 1/2″	25
S 720	19.0mm - 3/4″	25

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

BANDIMEX HOSE CLAMPS

preformed clamps

BANDIMEX preformed clamps are quickly and easily applied by means of a BANDIMEX tool and adapter.

The V 050 adapter allows clamping hose in the field without the use of a vice.

18 diameters in 5 widths, in CrNi, CrNiMo and galv, steel. Vibration proof!

For high volume clamping, hydraulic or pneumatic tools may be used.

W 001	BANDIMEX tool and	2.00 kg
V 050	BANDIMEX adapter	0.69 kg
V 001	BANDIMEX adapter	0.65 kg

CrNi	CrNiMo	Galv.	Clamp I.D.	Width	Thickness	kg
V240			19 mm - 3/4″	6.4 mm - 1/4″	0.50 mm - 0.020″	0.9
V201	V401	V301	21 mm - 13/16″	9.5 mm - 3/8″	0.64 mm - 0.025″	1.6
V242			25 mm - 1″	6.4 mm - 1/4″	0.50 mm - 0.020″	1.0
V243		V343	25 mm - 1″	9.5 mm - 3/8″	0.64 mm - 0.025″	1.8
V202	V402	V302	35 mm - 1 3/8″	9.5 mm - 3/8″	0.64 mm - 0.025″	2.1
V203	V403	V303	25 mm - 1″	12.7 mm - 1/2″	0.75 mm - 0.030″	3.0
V204	V404	V304	32 mm - 1 1/4″	12.7 mm - 1/2″	0.75 mm - 0.030″	3.3
V241			35 mm - 1 3/8″	6.4 mm - 1/4″	0.50 mm - 0.020″	1.1
V252			38 mm - 1 1/2″	6.4 mm - 1/4″	0.50 mm - 0.020″	1.2
V205	V405	V305	38 mm - 1 1/2″	16.0 mm - 5/8″	0.75 mm - 0.030″	4.7
V236		V336	45 mm - 1 3/4″	12.7 mm - 1/2″	0.75 mm - 0.030″	4.0
V206	V406	V306	45 mm - 1 3/4″	16.0 mm - 5/8″	0.75 mm - 0.030″	5.1
V245		V345	48 mm - 1 7/8″	9.5 mm - 3/8″	0.64 mm - 0.025″	2.5
V253			51 mm - 2″	6.4 mm - 1/4″	0.50 mm - 0.020″	1.5
V207	V407	V307	51 mm - 2″	16.0 mm - 5/8″	0.75 mm - 0.030″	5.5
V227		V327	51 mm - 2″	19.0 mm - 3/4″	0.75 mm - 0.030″	6.8
V208	V408	V308	57 mm - 2 1/4″	16.0 mm - 5/8″	0.75 mm - 0.030″	6.0
V209	V409	V309	64 mm - 2 1/2″	16.0 mm - 5/8″	0.75 mm - 0.030″	6.3
V256			70 mm - 2 3/4″	6.4 mm - 1/4″	0.50 mm - 0.020″	1.7
V230		V330	70 mm - 2 3/4″	12.7 mm - 1/2″	0.75 mm - 0.030″	5.1
V210	V410	V310	70 mm - 2 3/4″	19.0 mm - 3/4″	0.75 mm - 0.030″	4.2
V244	V444		76 mm - 3″	6.4 mm - 1/4″	0.50 mm - 0.020″	1.9
V246	V446	V346	76 mm - 3″	9.5 mm - 3/8″	0.64 mm - 0.025″	3.4
V211	V411	V311	76 mm - 3″	19.0 mm - 3/4″	0.75 mm - 0.030″	4.4
V257			89 mm - 3 1/2″	6.4 mm - 1/4″	0.50 mm - 0.020″	2.1
V212	V412	V312	89 mm - 3 1/2″	19.0 mm - 3/4″	0.75 mm - 0.030″	4.9
V248	V448		102 mm - 4″	9.5 mm - 3/8″	0.64 mm - 0.025″	4.1
V249			102 mm - 4″	12.7 mm - 1/2″	0.75 mm - 0.030″	6.8
V213	V413	V313	102 mm - 4″	19.0 mm - 3/4″	0.75 mm - 0.030″	2.8
V214	V414	V314	114 mm - 4 1/2″	19.0 mm - 3/4″	0.75 mm - 0.030″	3.0
V215	V415	V315	127 mm - 5″	19.0 mm - 3/4″	0.75 mm - 0.030″	3.3
V216	V416	V316	152 mm - 6″	19.0 mm - 3/4″	0.75 mm - 0.030″	3.7

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

NORMA

HEAVY DUTY HOSE CLAMPS GBS SERIES

Part Number	Clamping Range	Band Width (mm)
GBS18/18W2	17-19mm	18.0
GBS20/18W2	19-21mm	18.0
GBS22/18W2	21-23mm	18.0
GBS24/18W2	23-25mm	18.0
GBS26/18W2	25-27mm	18.0
GBS28/18W2	27-29mm	18.0
GBS30/18W2	29-31mm	18.0
GBS33/18W2	31-34mm	18.0
GBS36/18W2	34-37mm	18.0
GBS39/18W2	37-40mm	18.0
GBS42/18W2	40-43mm	18.0
GBS45/20W2	43-47mm	20.0
GBS49/20W2	47-51mm	20.0
GBS53/20W2	51-55mm	20.0
GBS57/20W2	55-59mm	20.0
GBS61/20W2	59-63mm	20.0
GBS66/20W2	63-68mm	20.0
GBS71/25W2	68-73mm	25.0
GBS76/25W2	73-79mm	25.0
GBS82/25W2	79-85mm	25.0
GBS88/25W2	85-91mm	25.0
GBS94/25W2	91-97mm	25.0
GBS101/25W2	97-104mm	25.0
GBS108/25W2	104-112mm	25.0
GBS117/25W2	112-121mm	25.0
GBS126/25W2	121-130mm	25.0
GBS135/30W2	130-140mm	30.0
GBS145/30W2	140-150mm	30.0
GBS156/30W2	150-162mm	30.0
GBS168/30W2	162-174mm	30.0
GBS181/30W2	174-187mm	30.0
GBS194/30W2	187-200mm	30.0
GBS207/30W2	200-213mm	30.0
GBS220/30W2	213-226mm	30.0
GBS233/30W2	226-239mm	30.0
GBS246/30W2	239-252mm	30.0

- SIZE RANGE FROM 17-252mm
- ROLLED BAND EDGES
- HEAVY DUTY "T BOLT" DESIGN
- 430 STAINLESS STEEL BAND WITH MILD STEEL YELLOW CHROMATE BOLTS & TRUNNIONS - W2 SERIES

ALSO AVAILABLE - W4 SERIES
ALL 304 GRADE STAINLESS STEEL

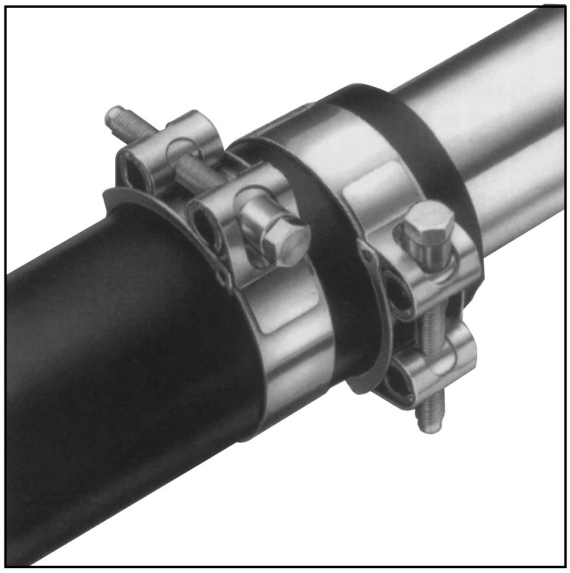

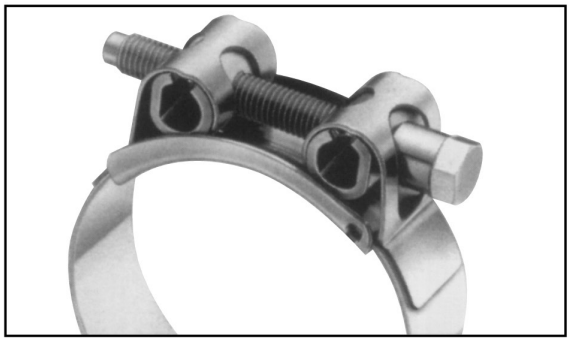

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

NORMA**CLAMP®**

Torro Worm Drive Hose Clamps

Torro® Worm Drive Hose Clamps are designed to meet industry expectations, featuring smooth band with rolled edges for maximum hose protection and patented one piece offset housing, delivering optimum sealing performance. Available in a material grade to suit all environmental environments.

Band Width	Trade Reference	Part Number	Clamping Range *(mm)*	**W2** Stainless Steel Band 1.4016 M/Steel Housing & Screw	**W3** M Stainless Steel 1.4016 (430)	**W4** M Stainless Steel 1.4301 (304)	**W5** M Stainless Steel 1.4401 (316)
7.5	0	8-12/7.5W*	8-12	●	●	●	
7.5	M00	10-16/7.5W*	10-16	●	●	●	
9.0	0	8-12/09W*	8-12				
9.0	M00	8-16/9W*	8-16	●	●	●	●
9.0	M00	10-16/9W*	10-16				
9.0	00	12-20/9W*	12-20	●	●	●	●
9.0	00	12-22/9W*	12-22				
9.0	0	16-25/9W*	16-25	●	●		●
9.0	1A	20-32/9W*	20-32	●	●		●
9.0	1	25-40/9W*	25-40	●	●		●
9.0	1X	30-45/9W*	30-45	●	●		●
9.0	2A	32-50/9W*	32-50	●	●		●
9.0	2/2X	40-60/9W*	40-60	●	●		●
9.0	3	50-70/9W*	50-70	●	●		●
9.0	-	60-80/9W*	60-80	●	●		●
9.0	4	70-90/9W*	70-90	●	●		●
9.0	-	80-100/9W*	80-100	●	●		●
9.0	5	90-110/9W*	90-110	●	●		●
12.0	0	16-27/12W*	16-27		●	●	●
12.0	1A	20-32/12W*	20-32		●		
12.0	1	25-40/12W*	25-40		●	●	●
12.0	1X	30-45/12W*	30-45		●	●	●
12.0	2A	35-50/12W*	35-50		●	●	●
12.0	2/2X	40-60/12W*	40-60		●	●	●
12.0	3	50-70/12W*	50-70		●		
12.0	-	60-80/12W*	60-80		●	●	●
12.0	4	70-90/12W*	70-90		●	●	●
12.0	-	80-100/12W*	80-100		●	●	●
12.0	5	90-110/12W*	90-110		●	●	●
12.0	-	100-120/12W*	100-120		●	●	●
12.0	6	110-130/12W*	110-130		●	●	●
12.0	-	120-140/12W*	120-140		●	●	●
12.0	-	130-150/12W*	130-150		●	●	●
12.0	7	140-160/12W*	140-160		●	●	●
12.0	-	150-170/12W*	150-170		●	●	●
12.0	8	160-180/12W*	160-180		●	●	●
12.0	-	170-190/12W*	170-190				
12.0	9	180-200/12W*	190-200		●		
12.0	-	190-210/12W*	190-210				
12.0	-	200-220/12W*	200-220				
12.0	10	210-230/12W*	210-230		●		
12.0	11	230-250/12W*	230-250		●		
12.0	12	260-280/12W*	260-280		●		
12.0	13	280-300/12W*	280-300		●		

**** INSERT 2,3,4 OR 5 AS PER TABLE ABOVE***

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

ASSORTED FITTINGS

STAINLESS STEEL FITTINGS


HEXAGON NIPPLE


HEXAGON NIPPLE REDUCING


BARREL NIPPLE FROM PIPE


WELDING NIPPLE FROM PIPE

HEXAGON WELDING NIPPLE


HOSE BARB


HALF SOCKET (COUPLING) PLAIN

SOCKET (COUPLING) BANDED

SOCKET (COUPLING) PLAIN

SOCKET (COUPLING) BANDED REDUCING


HEXAGON BUSHING M/F

BACKNUT (LOCKNUT)


ELBOW 90 EQUAL BANDED F/F

STREET ELBOW 90 M/F


ELBOW 45 EQUAL BANDED F/F

TEE BANDED

CROSS BANDED


HEXAGON PLUG, TAPER (CONICAL) THREAD

ROUND CAP BANDED


UNION CONICAL JOINT BW/F

SANITARY FITTINGS

Y PIECE


EQUAL & REDUCING TEE


45° TEE


SWEEP TEE


BSM NUT & HOSE TAIL


BUTTWELD HOSE TAIL

CROSS

BENDS 45°, 90° & 180°


BSM UNION CIP & RJT


CLAMP UNION

CLAMP

CAP


CONCENTRIC RE-DUCER

ECCENTRIC REDUCER


BALL VALVES

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

316 STAINLESS STEEL WINE HOSE CONNECTIONS

BSM FEMALE NUT & TAIL 316S/S

1″	9410/A
1½″	9412/A
2″	9413/A
2½″	9414/A
3″	9415/A
4″	9416/A

BSM MALE TAIL 316S/S

1″	9400/A
1½″	9402/A
2″	9403/A
2½″	9404/A
3″	9405/A
4″	9406/A

HOSE END RUBBER PROTECTOR

Suit 1″ BSM tail	PRO-16
Suit 1½″ BSM tail	PRO-24
Suit 2″ BSM tail	PRO-32
Suit 2½″ BSM tail	PRO-40
Suit 3″ BSM tail	PRO-48
Suit 4″ BSM tail	PRO-64

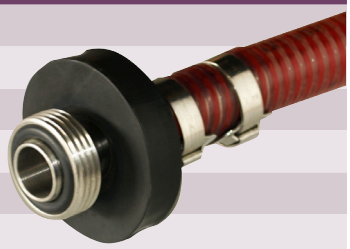

BSM MALE TAIL 'O' RING

Suit 1″ BSM male tail	M-16-OR
Suit 1½″ BSM male tail	M-24-OR
Suit 2″ BSM male tail	M-32-OR
Suit 2½″ BSM male tail	M-40-OR
Suit 3″ BSM male tail	M-48-OR
Suit 4″ BSM male tail	M-64-OR

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

2019 VINTAGE

ASSORTED FITTINGS

KAMLOCK COUPLINGS

TYPE A



TYPE B

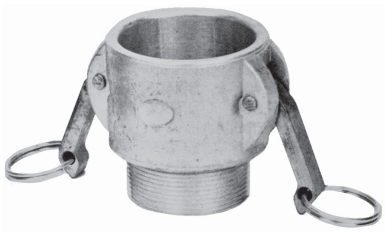

TYPE C

TYPE D

TYPE E

TYPE F

TYPE DC

TYPE DP



GASKETS



All available in sizes from 20mm to 150mm, in Stainless Steel, Aluminium, Polypropylene and Brass.

MALE HOSE TAILS



FEMALE NUT & TAILS



Available in brass, stainless steel and polypropylene in sizes from 1/2" to 4"

BRASS BALL VALVES



1-piece



2-piece





Butterfly Valves





Full bore - lever handle

Available in sizes from 1/4" to 4"
Stainless Steel also available

Contact our Customer Service team on 8352 1144 for more information

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

PIPE CLEANING PIGS

PIPE CLEANING PIGS - Plain

Polyurethane Foam. Suitable for cleaning tube and hose. All sizes 110mm long.

1″ Tube Cleaner Plain	TCS-16
1.25″ Tube Cleaner Plain	TCS-20
1.5″ Tube Cleaner Plain	TCS-24
2″ Tube Cleaner Plain	TCS-32
2.5″ Tube Cleaner Plain	TCS-40
3″ Tube Cleaner Plain	TCS-48
4″ Tube Cleaner Plain	TCS-64

PIPE CLEANING PIGS - Head Only Abrasive

Polyurethane Foam. Suitable for cleaning tube and hose. All sizes 110mm long.

1″ Tube Cleaner Head Only Abrasive	TCA-16
1.25″ Tube Cleaner Head Only Abrasive	TCA-20
1.5″ Tube Cleaner Head Only Abrasive	TCA-24
2″ Tube Cleaner Head Only Abrasive	TCA-32
2.5″ Tube Cleaner Head Only Abrasive	TCA-40
3″ Tube Cleaner Head Only Abrasive	TCA-48
4″ Tube Cleaner Head Only Abrasive	TCA-64
6″ Tube Cleaner Head Only Abrasive	TCA-96

PIPE CLEANING PIGS - Full Wrap Abrasive

Polyurethane Foam. Suitable for cleaning tube and hose. All sizes 110mm long.

1.5″ Tube Cleaner Full Wrap Abrasive	TCAW-24
2″ Tube Cleaner Full Wrap Abrasive	TCAW-32
3″ Tube Cleaner Full Wrap Abrasive	TCAW-48
4″ Tube Cleaner Full Wrap Abrasive	TCAW-64
6″ Tube Cleaner Full Wrap Abrasive	TCAW-96

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

GUNNA WASHDOWN GUN

PART NUMBER: 28-050-012B

The Gunna washdown gun can be used for efficient wash down applications in wineries, breweries, factories, dairies etc.

Operation is simple, allowing a straight jet or fan spray pattern. The volume can be easily adjusted by turning the screw at the back of the gun.

Made from stainless steel and complete with blue jacket, it will give you years of trouble free operation.

Features
For water use only
Max working pressure 90PSI (620kpa)
Max operating temperature 80°C
Jet or fan spray pattern
Easy volume adjustment
Specially designed non-slip rubber grip (will not rotate on handle during usage)
Protective handle - OH&S approved

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

NOZZLES

QUELL STYLE HOSE REEL NOZZLE - Jet / Spray - On / Off

Part Number	Size (Inches)
28-007-012	3/4" HOSE TAIL

NOZZLE FIRE HOSE REEL - Jet - On / Off

Part Number	Size (Inches)
28-005-012	3/4" BSPF

JET NOZZLE - Brass

Part Number	Size (Inches)
28-031-012	1/2" BSPM
28-031-020	3/4" BSPM

BALL VALVE NOZZLE - Nickel Plated Brass

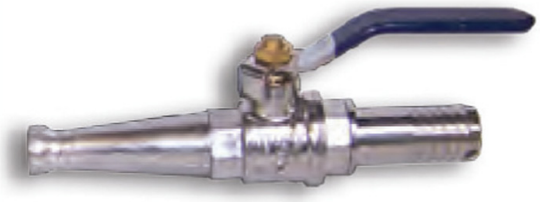

Part Number	Size (Inches)
25-160-008	1/2" HOSE TAIL
25-160-012	3/4" HOSE TAIL
25-160-016	1" HOSE TAIL

POWERJET NOZZLE - Red Plastic Body with Soft Cushion Ring and Brass Diffuser

Part Number	Size (Inches)
28-001-016	1" BSPF
28-001-024	1 1/2" BSPF

OTHER NOZZLE OPTIONS AVAILABLE

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

NEW PRODUCTS

2019 VINTAGE

WINEMAKING FITTINGS & ACCESSORIES

RUBBERISED BSM NUTS

These are ideal for protecting hose ends on your hose assemblies. The rubber outer around the nut will withstand the punishment of vintage and keep your expensive hose tails safe when dropped or dragged around.

RUBB0050B	50mm
RUBB0076B	76mm

ROFF VALVES

This is a two-way breather which can help maintain stable pressure in tanks and tankers. The two-way mechanism allows air to flow both ways where required, with a seal inside to prevent fluid loss.

RV0001-76	76mm

BARREL BUNGS

WBC001

SPRAY BALLS

SB0025

63mm ball size

MANWAY SEALS

Double-sided to allow longer life. Designed to suit a large variety of tanks, including Byfords, Zorzini, Fratelli Laveggi.

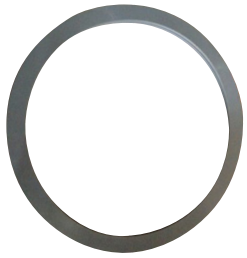

MWS1632

HOSE STRAINERS

76mm, specially designed to keep flow constant while acting as a barrier for larger unwanted items.

HS0076

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

B.L.Shipway

for SEALING SOLUTIONS

BL Shipway are the distribution partner for Ludowici & Freudenberg Sealing Technologies

LUDOWICI™
SEALING SOLUTIONS

FREUDENBERG
INNOVATING TOGETHER

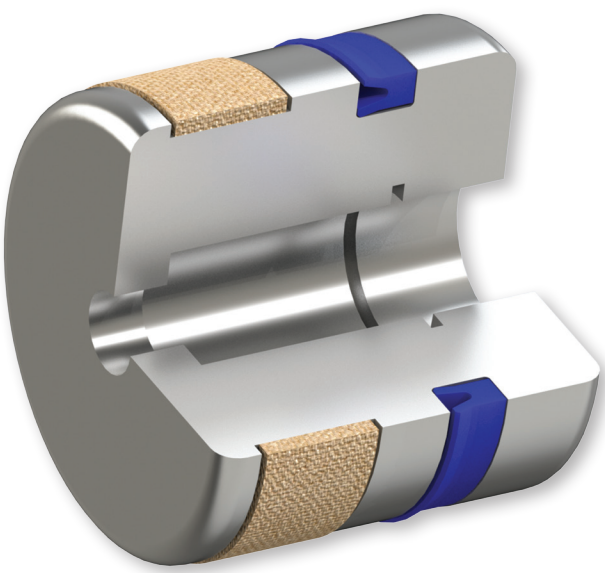

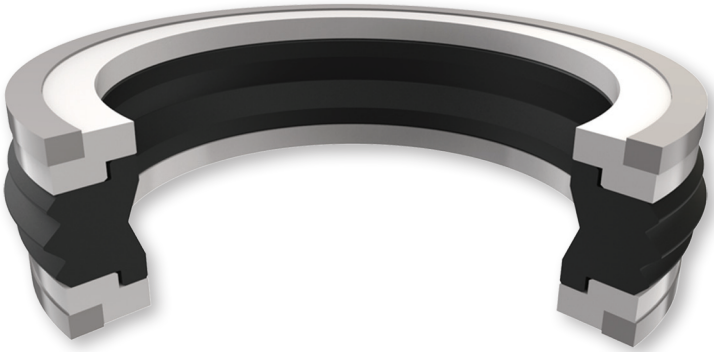

2019 VINTAGE

SEALING SOLUTIONS

GASKETS

Heightened for performance through a balance of material and design, our gaskets supply maximum sealing and durability. Technologies include: homogenous rubber (press-in-place), carrier-type (plastic/metal), embossed steel, stamped composites, along with high-temp alloy materials and secondary coatings.

HDP SEALS

These precision-moulded hydraulic cylinder piston seals offer extreme strength against gap extrusion and high abrasion resistance. Unique moulding techniques provide dimensional stability, making it the ultimate seal to offer tight sealing and drift resistance for extreme conditions and pressure up to 800 bar.

O-RINGS

Custom compounds that withstand biodiesel (fuel systems), aggressive oils (power systems), coolants (cylinder liners), along with Six Sigma manufacturing capability transform the average standard O-ring into an integral part of the sealing system.

NEW POLYURETHANE

This superior, cost-effective urethane encompasses many market needs with one material. AU30000 seals handle higher temperatures, higher pressures, and more diverse fluids, and last longer overall. Ratings of 500 bar and -40°C to 120°C put this urethane in a class of its own.

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

2019 VINTAGE

PUMPS & FLOW METERS

BL Shipway is proud distributor for JSG Industrial Systems. Renowned for the quality of brands they import, such as Lincoln Lubrication Systems, they also import All-Flo diaphragm pumps and GPI Flow Meters. Below is just a small selection of the range available through BL Shipway.

All-Flo A200 2" Air Operated Double Diaphragm Pump

The newly designed All-Flo pump boasts a new high efficiency air valve, built with fewer parts, making it the most air-efficient pump in the industry. The A200 comes in either Aluminium or 316 Stainless Steel, and a variety of different materials are available for the internal components, to make it suitable for your application. These pumps have stall-free, breeze-free and lube-free components, built to handle extreme weather conditions. Available with NPT or BSP connections.

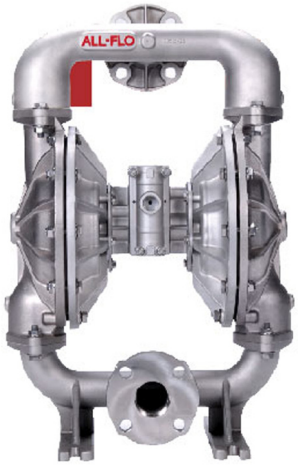

Dimensions & Performance

Weight:	Aluminium pump: 28kg, Stainless Steel pump: 59kg
Max Flow:	719 litres per minute
Max Air Pressure:	120 psi (8.3 bar)
Noise Level:	76dB (with muffler)
Max Suction Lift (wet):	9.8m above water source

ALL-FLO PUMP CO.

All-Flo A050 1/2" Air Operated Double Diaphragm Pump

Dimensions & Performance

Weight:	Aluminium pump: 4.5kg, Stainless Steel pump: 9.1kg
Max Flow:	55 litres per minute
Max Air Pressure:	120 psi (8.3 bar)
Noise Level:	80dB (with muffler)
Max Suction Lift (wet):	9.4m above water source

ALL-FLO PUMP CO.

GPI TM Series Water Meter

The TM Series Meters are designed for use in water applications. These meters are used in irrigation districts, landscaping applications or for monitoring greywater. Available in BSPP threads in 1", 1 1/2" and 2", or with DIN flanges in 3" and 4". Displays both metric and imperial measurements,, with a 5-year battery life and accuracy within 3% of reading.

More pumps and meters available, please call (08) 8352 1144 for assistance

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

Camozzi's pneumatic components.

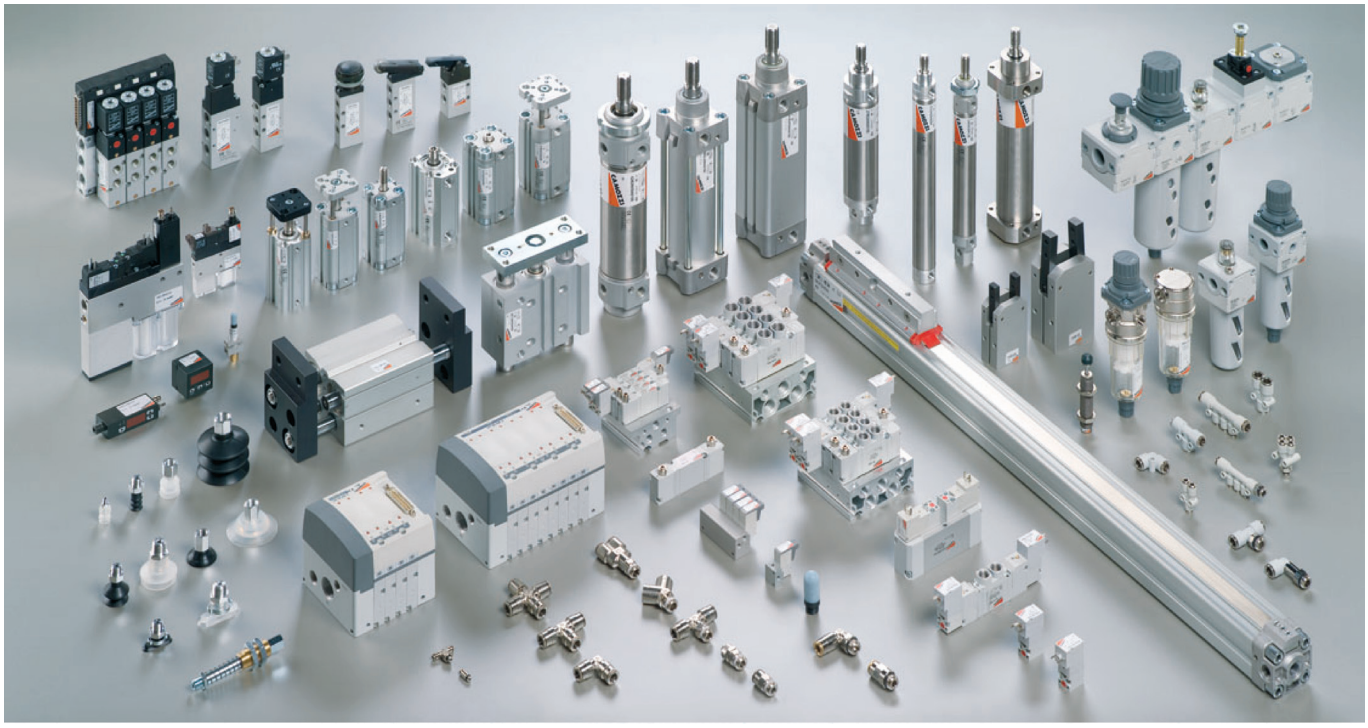

Air that moves the world.

CAMOZZI

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL

ENERPAC®

Put the pressure on Shipways for all for your ENERPAC® products, repairs and technical assistance

ENERPAC® Authorised Service Centre

TO ORDER OR FOR MORE INFORMATION CONTACT:

B.L.Shipway
ESTABLISHED 1953

217 Richmond Road,
RICHMOND SA 5033
PH: (08) 8352 1144
F: (08) 8443 6327
E-Mail: sales@blshipway.com.au
Web site: www.blshipway.com.au

SOUTH AUSTRALIA

Certified System
Quality
ISO 9001
SAI GLOBAL